





# GA1

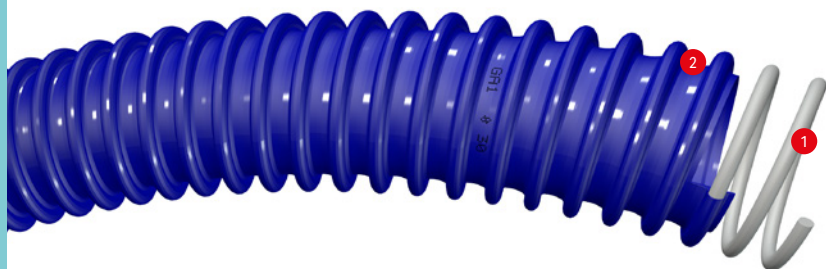

- 1 Spiral in rigid PVC
- 2 Wall in soft blue PVC

## APPLICATIONS

Ventilation, suction of air and fumes.



## MARKING

GA1 Ø inn [Batch number]

## Flexible ducting in PVC for ventilation and fumes suction.

Reinforced with a rigid PVC spiral.

### ADVANTAGES

Extremely lightweight and highly flexible, the GA1 ducting hose offers excellent mechanical resistance. Its smooth inner wall ensures minimal pressure loss.

### CONNECTORS

Connectors with wire clamps or screwed fittings (left hand spiral).

### CHEMICAL RESISTANCE

See table pages 110 to 113 column A.

|  |  |  |  |  |  |  | Blue<br>30 m |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------|
| 25                                                                                  | +/-0.8                                                                              | 0,5                                                                                 | 2                                                                                   | 130                                                                                 | 300                                                                                 | 25                                                                                  | 190813       |
| 30                                                                                  | +/-0.8                                                                              | 0,5                                                                                 | 2                                                                                   | 150                                                                                 | 300                                                                                 | 30                                                                                  | 190826       |
| 35                                                                                  | +/-1.0                                                                              | 0,5                                                                                 | 2,25                                                                                | 180                                                                                 | 300                                                                                 | 35                                                                                  | 190839       |
| 38                                                                                  | +/-1.0                                                                              | 0,5                                                                                 | 2,25                                                                                | 200                                                                                 | 300                                                                                 | 38                                                                                  | 190913       |
| 40                                                                                  | +/-1.0                                                                              | 0,5                                                                                 | 2,4                                                                                 | 210                                                                                 | 200                                                                                 | 40                                                                                  | 190842       |
| 50                                                                                  | +/-1.2                                                                              | 0,5                                                                                 | 2,6                                                                                 | 340                                                                                 | 200                                                                                 | 50                                                                                  | 190855       |
| 63                                                                                  | +/-1.2                                                                              | 0,5                                                                                 | 3                                                                                   | 425                                                                                 | 200                                                                                 | 63                                                                                  | 190926       |