
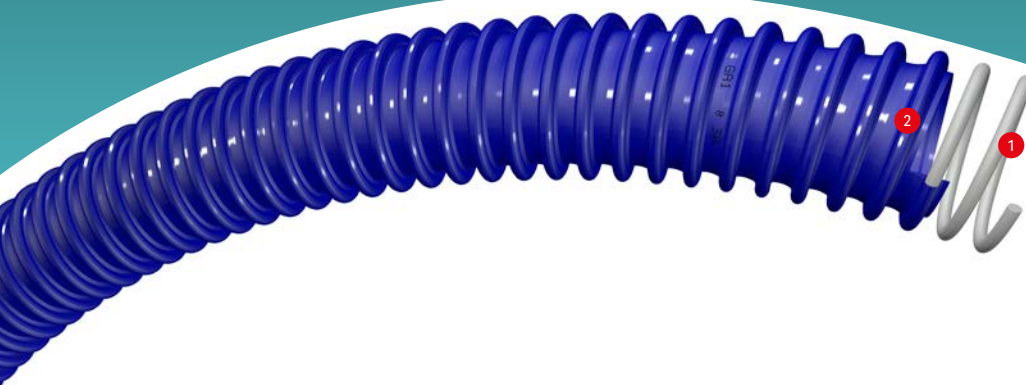


GAINE GA1



300 | 200
mbar

+60
- 15
°C



- 1 Spiral in rigid PVC
- 2 Wall in soft blue PVC

FLEXIBLE DUCTING IN PVC FOR VENTILATION AND FUMES SUCTION.

Reinforced with a rigid PVC spiral.

APPLICATIONS

Ventilation, suction of air and fumes

SECTORS OF ACTIVITY

Industry

MARKING

GA1 Ø inn [Batch number]

ADVANTAGES

Ducting G.A.1 is very light and high flexible. Its smooth inner wall assures low flow losses.

CONNECTORS

Connectors with wire collars or screwed fittings (left hand spiral).

CHEMICAL RESISTANCE

See table pages 114 to 117 column A.

Ø mm	+/- mm	Ø mm	mm	g/m	mbar	mm	Blue 30 m
25	+/-0.8	0,5	2	130	300	25	190813
30	+/-0.8	0,5	2	150	300	30	190826
35	+/-1.0	0,5	2,25	180	300	35	190839
38	+/-1.0	0,5	2,25	200	300	38	190913
40	+/-1.0	0,5	2,4	210	200	40	190842
50	+/-1.2	0,5	2,6	340	200	50	190855
63	+/-1.2	0,5	3	425	200	63	190926