



# SUPER THERMOCLEAN® 40



SIMULANTS A, B, C  
 • fruit juices  
 • wines



## APPLICATIONS

Industrial cleaning.



## MARKING

SUPER THERMOCLEAN 40 BAR / 70°C (EU) N° 10/2011 [year of fabrication] [Batch number]

## Medium-pressure industrial cleaning hose (40 bar at 70°C).

Six-layer design with double polyester fibre reinforcing.

### ADVANTAGES

Super material properties of SUPER THERMOCLEAN® 40 make it a high-performance, safe and reliable hose capable of meeting severe conditions:  
 • exceptional temperature performance (up to 70°C under 40 bar continuously, peaks possible up to 80°C);  
 • six highly flexible layers provide excellent handling;  
 • non-staining blue outer surface is resistant to oily products and detergents;  
 • excellent kinking resistance.


### CONNECTORS

Barbed connectors with 'O' type clips (retighten the clips after first high temperature use).  
 Crimping is possible under certain conditions.

### CHEMICAL RESISTANCE

See table pages 110 to 113 column B.

Outer diameter mm	Inner diameter mm	Outer wall thickness mm	Inner wall thickness mm	Outer reinforcement mm	Inner reinforcement mm	Weight g/m	20°C bar	70°C bar	20°C bar	70°C bar	Outer diameter mm	Blue		
												25 m	50 m	100 m
12	+/- 0,6	22	+/- 0,8	5	335	240	120	80	40	84	100758	100761	100774	

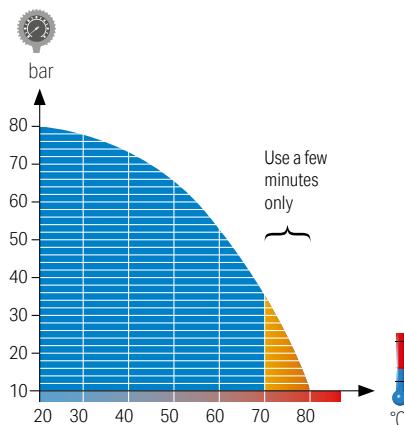

Maximum working pressure  
40 bar at 70°C