



SUPER THERMOCLEAN® 40



SIMULANTS A, B, C

- fruit juices
- wines

240
bar

+70

- 10



°C



- 1 Blue cover in flexible, non-staining, greaseproof, detergent and disinfectant resistant food grade PVC
- 2 4 Double polyester reinforcing
- 3 5 Intermediary layers in flexible PVC
- 6 Inner surface in flexible grey PVC

APPLICATIONS

Industrial cleaning.



MARKING

SUPER THERMOCLEAN 40 BAR / 70°C (EU) N° 10/2011 [year of fabrication] [Batch number]

Average pressure industrial washing hose (40 bar at 70°C).

Six-layer design with double polyester fibre reinforcing.

ADVANTAGES

Super material properties of SUPER THERMOCLEAN® 40 make it a high-performance, safe and reliable hose capable of meeting severe conditions:

- exceptional temperature performance (up to 70°C under 40 bar continuously, peaks possible up to 80°C);
- six highly flexible layers provide excellent handling;
- non-staining blue outer surface is resistant to oily products and detergents;
- excellent kinking resistance.


CONNECTORS

Barbed connectors with 'O' type clips (retighten the clips after first high temperature use).
Crimping is possible under certain conditions.

CHEMICAL RESISTANCE

See table pages 110 to 113 column B.

											Blue		
mm	mm	mm	mm	g/m	20°C bar	70°C bar	20°C bar	70°C bar	20°C bar	70°C bar	25 m	50 m	100 m
12	+/-0.6	22	+/-0.8	5	335	240	120	80	40	84	100758	100761	100774

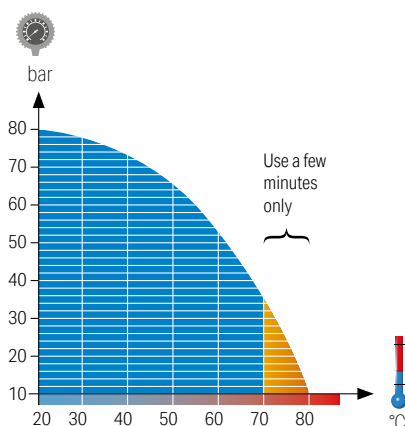

Maximum working pressure
40 bar at 70°C