


TRICOFLEX®

Classic

25 | 20
bar

+60
- 15
°C

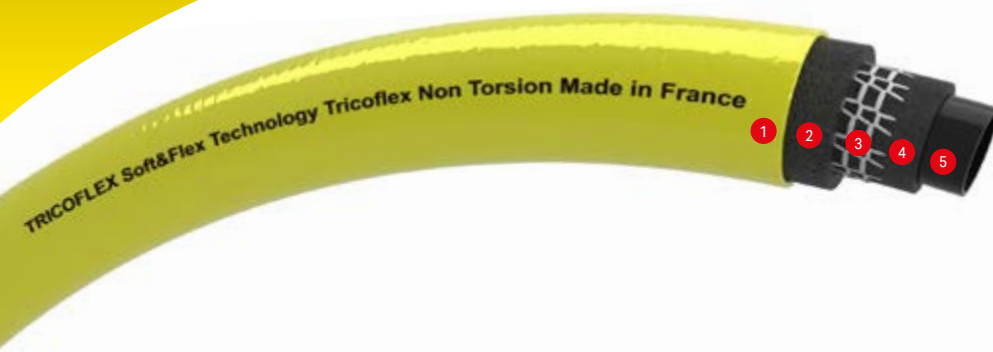

- 1 Yellow or green PVC covering
- 2 Intermediate layer of flexible PVC yellow
- 3 Textile knitted reinforcement TNT
- 4 Intermediate layer of soft black PVC
- 5 Smooth black inner tube

FLEXIBLE MULTILAYER HOSE.

Exterior covering in ultra UV resistant PVC. With woven polyester fibre reinforcement and two-layer smooth lining.

APPLICATIONS

Watering, irrigation, water supply and delivery

SECTORS OF ACTIVITY

Farms, vegetable growers, horticulture, water supply and delivery in industry, construction sites and road works

MARKING

TRICOFLEX Soft & Flex Technology Tricoflex Non Torsion Made in France [Batch number]

ADVANTAGES

The multi-layer design, made of an exclusive woven fibre and a double core layer, ensures that TRICOFLEX® is highly flexible for easy handling, with excellent resistance to repeated bending, crushing and pulling as well as minor deformation under pressure.

In addition, the lining is extremely smooth, thereby maintaining even flow. Especially thick and made of high quality materials, TRICOFLEX® offers remarkable aging resistance with exceptional preservation of flexibility. Its exterior yellow PVC covering gives it good protection against abrasion and UV.

CONNECTORS

Connectors with band, screw or 'O' type clamps. Automatic connectors for watering.

CHEMICAL RESISTANCE

See table pages 106 to 109 column A.



mm	mm	mm	bar	bar	mm	Yellow			Green	
						25 m	50 m	100 m	25 m	50 m
12,5	17,6	2,55	25	10	125	117135	117151	117016		
15	20,5	2,75	25	10	135	116861	116874	054426	117045	117051
19	25,3	3,15	23	9	180	116887	051546	054437	142916	051570
25	32,3	3,65	20	8	240	048273	048374	048363	048284	048385
30	39	4,5	20	8	300	048508	048510	048497		
35	45	5	20	8	350	048565	048554	048587		
40	51	5,5	20	8	400	048442	048453	048655		
50	63	6,5	20	8	500	048306	048341			