





WINDFLEX® 400 PU



- 1 Metallic spiral
2 Wall in transparent polyurethane

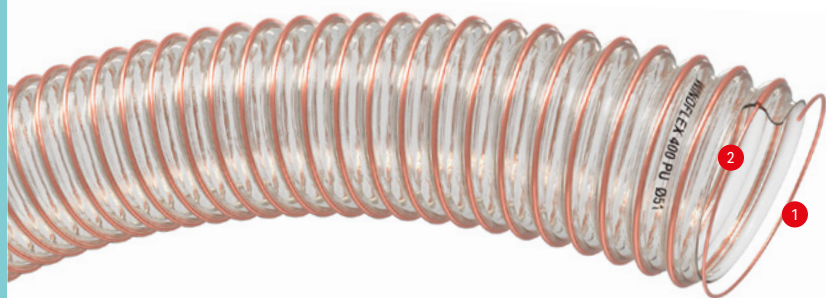

APPLICATIONS

Suction of: Sawdust and chips, air and fumes, oil, vapour extraction.

MARKING

↓ WINDFLEX® 400 PU ↓ Ø int

[Batch number]
Made in France

Flexible ducting in polyurethane ester with wall reinforced with a coppered steel wire helix. Spring quality.

Potential equalisation, earthed at the ends of the steel spiral. PU rated non flammable UL94 V2. Halogen free.

 mm	+/- mm	 mm	 g/m	 mbar	 mm	Transparent	
						5 m	10 m
51	0/+2,0	0,4	250	200	26		174733
60	0/+2,0	0,4	300	150	30		174734
70	0/+3,0	0,4	400	140	35		174747*
76	0/+3,0	0,4	380	100	38		174735
80	0/+3,0	0,4	400	100	40		174736
90	0/+3,0	0,4	440	100	45		174748*
102	0/+4,0	0,4	460	90	51		174737
120	0/+4,0	0,4	540	80	60		174738
127	0/+4,0	0,4	570	80	64		174739
140	0/+4,0	0,4	620	60	70		174740
152	0/+5,0	0,4	680	60	76		174741
160	0/+5,0	0,4	710	50	80		174742
180	0/+5,0	0,4	800	50	90		174743
203	0/+5,0	0,4	1010	50	102		174744
254	0/+5,0	0,4	1260	40	127		174745
300	0/+6,0	0,4	1520	30	152		174746
350	0/+6,0	0,4	2200	20	175		174749
400	0/+6,0	0,4	2520	20	200	174750*	
500	0/+6,0	0,4	3150	10	250	174751*	
600	0/+6,0	0,4	4600	10	300	174885*	



ADVANTAGES

WINDFLEX® 400 PU ducting has high flexibility and very good mechanical resistance, provided by the quality of the wall made from 100% polyurethane. Extremely good abrasion resistance. Excellent flexibility and elasticity. Remarkable for its wide temperature range of use.

CONNECTORS

Connectors with wire clamps. Small diameters can be screwed into themselves. We recommend checking before assembly that the fittings cannot harm the inner wall.

CHEMICAL RESISTANCE

See the Chemical resistance Chart of Hoses pages 110 to 113 column C.

* Non-stock item

WE HAVE THE POSSIBILITY TO MANUFACTURE OTHER LENGTHS
AND DIAMETERS ON REQUEST. CONSULT US.

delivery in coils
except compressed articles

