


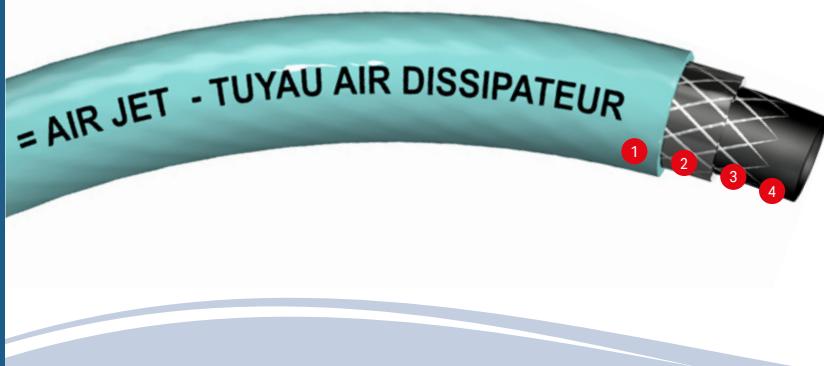

AIR JET

SUITABLE FOR USE
IN ATEX ZONES

- 1 Abrasion resistant TPU coating.
- 2 Intermediate, extra-flexible crystal TPU layer
- 3 Textile reinforcement
- 4 Black antistatic TPU inner wall

APPLICATIONS

Compressed air stations for pneumatic tools, compressors, paint sprayers with tanks.



MARKING

= AIR JET - TUYAU AIR DISSIPATEUR _DISSIPATER AIR HOSE - Ø INT _Ø Connectors ID - PMS/MWP
20BAR/290PSI @ 20°C/68°F - «Year of manufacturing» - MADE IN FRANCE - [Batch number]

Antistatic hose specially designed for compressed air supplies.

Design using four layers of extra-flexible TPU with a high tenacity polyester fibre reinforcement.

ADVANTAGES

The design of the AIR JET provides remarkable flexibility and strength while remaining very lightweight for easy handling.

Its balanced reinforcement ensures excellent pressure resistance and limits deformation, allowing it to withstand long and repeated impulse cycles — a guarantee of durability and safety.

The PU inner and outer coverings make it compatible with cleaning using solvents.

With a resistivity below $10^8 \Omega \cdot \text{m}$ (measured according to NF EN ISO 8031), the AIR JET meets the requirements of environments subject to electrostatic constraints.

CONNECTORS

To protect electric continuity, provide for metal fittings: NPS, express, hose or grooved quick couplings, metal clamps or ear clamps. Quick fittings Crimping is possible with non-damaging fittings. Before assembly, make sure the tip does not damage the inner pipe (especially the case of improperly deburred and therefore cutting fittings).

CHEMICAL RESISTANCE

See table pages 110 to 113 column C.

Ø mm	+/- mm	Ø mm	+/- mm	Ø mm	+/- mm	g/m	bar	bar	mm	Turquoise				
										25 m	152,5 m	175 m	200 m	250 m
6,5	+/- 0,5	10,5	+/- 0,5	2	61	60	20	60			125273			125274
8	+/- 0,5	12	+/- 0,5	2	72	60	20	70		125285	125286		125287	
9,5	+/- 0,5	14	+/- 0,6	2,25	100	60	20	80		125489	125490			