


# AIR-JET

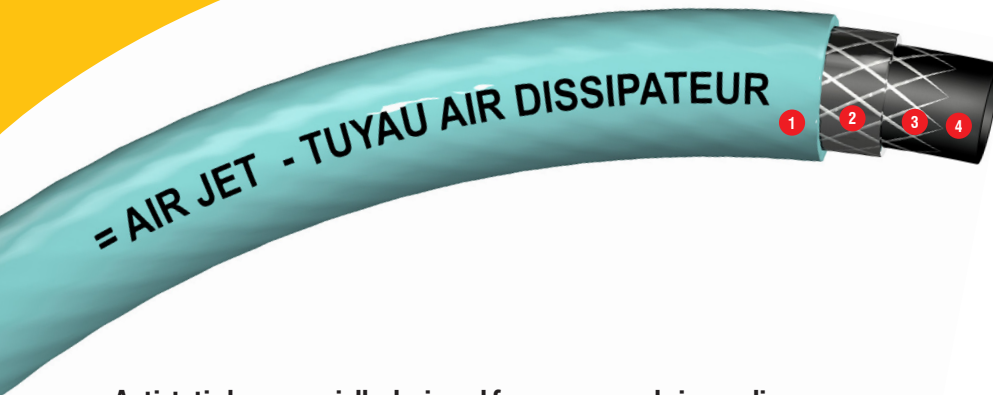

- 1 Abrasion resistant TPU coating.
- 2 Intermediate, extra-flexible crystal TPU layer
- 3 Textile reinforcement
- 4 Black antistatic TPU inner wall

## Antistatic hose specially designed for compressed air supplies.

Design using 4 layers of extra-flexible TPU with a high tenacity polyester fibre reinforcement.

### APPLICATIONS

Hose specially designed for compressed air supplies in arduous and/or high risk environments: compressed air stations for pneumatic tools, compressors, paint sprayers with tanks

### SECTORS OF ACTIVITY

Garages, automotive industry, plastics industry, assembly plants.

**RESISTIVITY <math>< 10^6 \Omega/M</math>  
COMPLIES WITH NF EN ISO 8031**

### Marking

= AIR JET - TUYAU AIR DISSIPATEUR \_DISSIPATER AIR HOSE – Ø INT\_ Ø Connectors ID - PMS/MWP  
20BAR/290PSI @ 20°C/68°F - «Year of manufacturing» - MADE IN FRANCE = [Batch number]

### ADVANTAGES

AIR-JET's design gives it exceptional flexibility and strength. Its very light weight makes it easy to handle.

Its balanced reinforcement allows it to withstand pressure with only minimal deformation. It can therefore withstand long and frequent pressure pulses, guaranteeing a long service life and safety.








The inner and outer PE sheaths make it compatible with cleaning using solvents

### CONNECTORS

To protect electric continuity, provide for metal fittings: NPS, express, hose or grooved quick couplings, metal clamps or ear clamps. Quick fittings Crimping is possible with non-damaging fittings. Before assembly, make sure the tip does not damage the inner pipe (especially the case of improperly deburred and therefore cutting fittings).

### CHEMICAL RESISTANCE

See the chemical resistance table column C on our catalogue or go to our web site [www.tricoflex.com](http://www.tricoflex.com)

	+/- mm		+/- mm						Turquoise	
									L (m)	Ref
6,5	+/-0,5	10,5	+/-0,5	2	61	60	20	60	25	125272
									152,5	125273
									250	125274
8	+/-0,5	12	+/-0,5	2	72	60	20	70	25	125285
									152,5	125286
									200	125287
									25	125488
9,5	+/-0,5	14	+/-0,6	2,25	100	60	20	80	152,5	125489
									25	125490
									175	125490

# ASSEMBLIES



Fittings 1/4'			
⌀ (mm)	L (m)	Ref	Mini ord (PC/cart)
6,5	5	125275	8
	7,5	125276	8
	10	125277	7
	15	125278	4
8	7,5	125288	8
	10	125289	6
	15	125290	6
9,5	5	125491	8
	7,5	125492	8
	15	125493	4