


# WINDFLEX® 1308 PU



- 1 Ducted steel coil
- 2 Translucent polyurethane wall

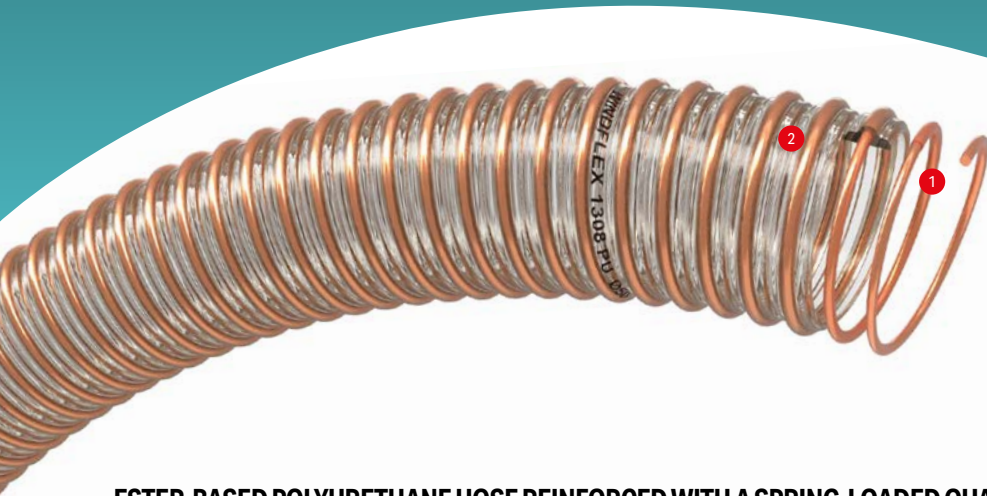

## ESTER-BASED POLYURETHANE HOSE REINFORCED WITH A SPRING-LOADED QUALITY STEEL COIL. RECOMMENDED FOR INTENSIVE USE.

UL94 V2 certified non-flammable polyurethane.

### APPLICATIONS

Suction and expulsion of powders, pellets, abrasive particles, oil fumes.

### SECTORS OF ACTIVITY

All industries, timber and paper, plastics, quarries, construction

### MARKING

↓ WINDFLEX® 1308 PU ↓ Ø inn

[Batch number]  
Made in France

mm	+/- mm	mm	g/m	mbar	mm	Transparent		
						5 m	10 m	mini of order (m)
40	0/+2,0	0,9	360	450	48		174840*	30
50	0/+2,0	0,9	400	400	60		174841*	30
60	0/+2,0	0,9	490	350	72		174843*	30
70	0/+2,0	0,9	630	350	84		174844*	30
76	0/+2,0	0,9	680	300	91		174845*	30
80	0/+2,0	0,9	700	300	96		174846*	30
90	0/+2,0	0,9	800	300	108		174847*	30
102	0/+2,0	1,1	980	300	122		174848*	10
110	0/+2,0	1,1	1140	250	132		174849*	10
120	0/+2,0	1,1	1240	250	144		174850*	10
130	0/+2,0	1,1	1400	200	156		174852*	10
140	0/+2,0	1,1	1450	200	168		174851*	10
150	0/+2,0	1,2	1550	200	180		174835*	10
160	0/+2,0	1,2	1650	160	192		174853*	10
180	0/+2,0	1,2	1850	150	216		174837*	10
200	0/+2,0	1,2	2350	120	240		174836*	10
225	0/+2,0	1,3	2400	100	270		174639*	10
250	0/+2,0	1,3	2700	100	300		174640*	10
300	0/+2,0	1,3	4100	90	360		174641*	10
350	0/+2,0	1,3	4750	90	420	174642*		5
400	0/+2,0	1,3	5400	80	480	174643*		5
500	0/+2,0	1,3	7300	40	600	174644*		5

### ADVANTAGES

The highly flexible WINDFLEX® 1308 PU ducting offers excellent resistance to negative pressure, abrasions and repeated bending. Its extremely smooth internal surface limits pressure loss. Equipotential bonding can be achieved by connecting the steel spiral at both ends.

### CONNECTORS

Semi-heavy clamp or bearings. Before assembly, make sure that the connector is not hazardous to the inner tube (particularly in the case of poorly fettled and therefore sharp fittings).

### CHEMICAL RESISTANCE

See table pages 114 to 117 column C.

\*on request: delivery time 4 weeks

Delivery in coils

WE HAVE THE POSSIBILITY TO MANUFACTURE OTHER LENGTHS AND DIAMETERS ON REQUEST. CONSULT US.