


WINDFLEX® 2200 PU new



- 1 Copper color steel spiral
- 2 Transparent polyurethane thick wall

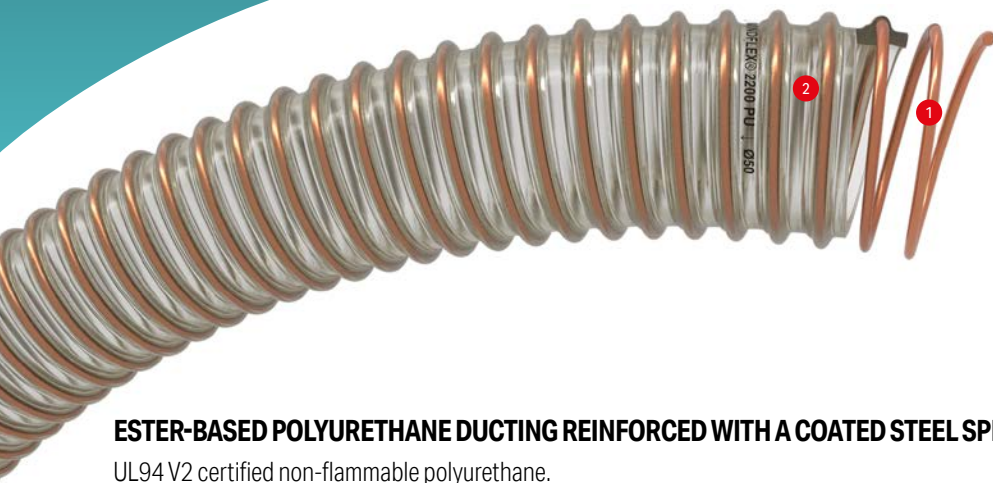

ESTER-BASED POLYURETHANE DUCTING REINFORCED WITH A COATED STEEL SPIRAL. RECOMMENDED FOR INTENSIVE USE.

UL94 V2 certified non-flammable polyurethane.

APPLICATIONS

Suction and expulsion of powders, pellets, abrasive particles, filings, shavings, gravel, sand

SECTORS OF ACTIVITY

All industries: timber and paper, plastics, quarries, construction

MARKING

↓ WINDFLEX® 2200 PUR ↓ Ø inn

[Batch number]
Made in France

mm	+/- mm	mm	g/m	mbar	mm	Transparent	
						10 m	mini of order (m)
40	0/+2,0	2,2	750	950	88	174652*	10
45	0/+2,0	2,2	850	950	99	174653*	10
50	0/+2,0	2,2	900	950	110	174654*	10
60	0/+2,0	2,2	1080	950	132	174655*	10
70	0/+2,0	2,2	1260	950	154	174656*	10
76	0/+2,0	2,2	1331	950	167	174657*	10
80	0/+2,0	2,2	1400	950	176	174658*	10
90	0/+2,0	2,2	1600	900	198	174659*	10
100	0/+2,0	2,2	1940	900	220	174660*	10

ADVANTAGES

The durable WINDFLEX® 2200 PU ducting offers excellent resistance to negative pressure, abrasions and repeated bending. Its extremely smooth internal surface limits pressure loss. Equipotential bonding can be achieved by connecting the steel spiral at both ends.

CONNECTORS

Regular single-wire hose clamps. Before assembly, make sure that the connector is not damaging to the inner tube (particularly in the case of poorly deburred and sharp fittings).

CHEMICAL RESISTANCE

See table pages 114 to 117 column C.

Delivery in coils

WE HAVE THE POSSIBILITY TO MANUFACTURE OTHER LENGTHS AND DIAMETERS ON REQUEST. CONSULT US.

*on request: delivery time 4 weeks