


SUPER NOBELAIR®

Classic



+60
-15
°C

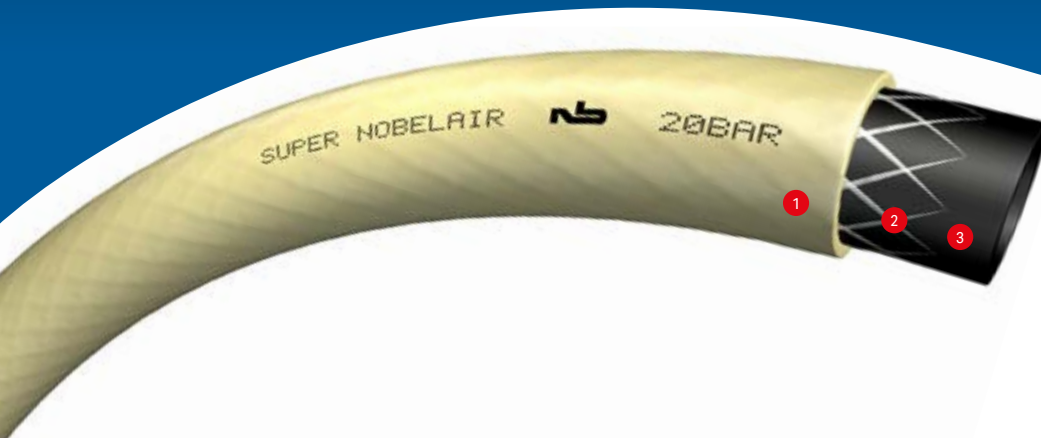

- 1 Flexible beige PVC
- 2 Polyester reinforcement
- 3 Flexible black PVC

HOSE FOR COMPRESSED AIR SUPPLY.

Three layer design, in extra flexible PVC, with high resistant polyester fibre reinforcement.

APPLICATIONS

Pneumatic tools, equipment of assembly workshops, wall mounted reels, carts and compressors

SECTORS OF ACTIVITY

Automotive industry, plastics industry, assembly factories, garages (for cars, lorries and agricultural vehicles), woodwork

MARKING

SUPER NOBELAIR 20 BAR [Batch number]

ADVANTAGES

The balanced reinforcement of SUPER NOBELAIR® enables it to withstand high pressure with minimal distortion. Thus, it can withstand extended and frequent pressure impulse cycles.

The composition of this flexible and light hose provides it with good resistance to impacts and distortion.

Moreover, the PVC composition eliminates any risks of cracks appearing (particular defect of rubbers), thus improving safety and a long service life.

CONNECTORS

Quick connectors, barbed or serrated connectors.

Band, worm drive, screw or butterfly clamps.

Swaged fittings can be used if they do not damage the hose.

CHEMICAL RESISTANCE

[See table pages 106 to 109 column A.](#)

	+/-		+/-					Beige			
								mm	mm	g/m	bar
6.3	+/-0.3	11	+/-0.3	2.35	85	60	20	45			
7	+/-0.4	12	+/-0.4	2.5	90	60	20	49	198051		
8	+/-0.4	13	+/-0.4	2.5	107	60	20	56	198093	198106	198119
9	+/-0.5	14.5	+/-0.5	2.75	132	60	20	63		198148	
10	+/-0.5	15.5	+/-0.5	2.75	143	60	20	70	198177	198180	
12.7	+/-0.6	19	+/-0.6	3.15	205	60	20	89	198212	198225	198238
16	+/-0.6	23	+/-0.6	3.5	284	60	20	112	198254	198267	
19	+/-0.8	26.5	+/-0.8	3.75	352	60	20	145	198296	198309	198312
25	+/-1.0	33.5	+/-1.0	4.25	515	60	20	210	198338	198341	